




Front View

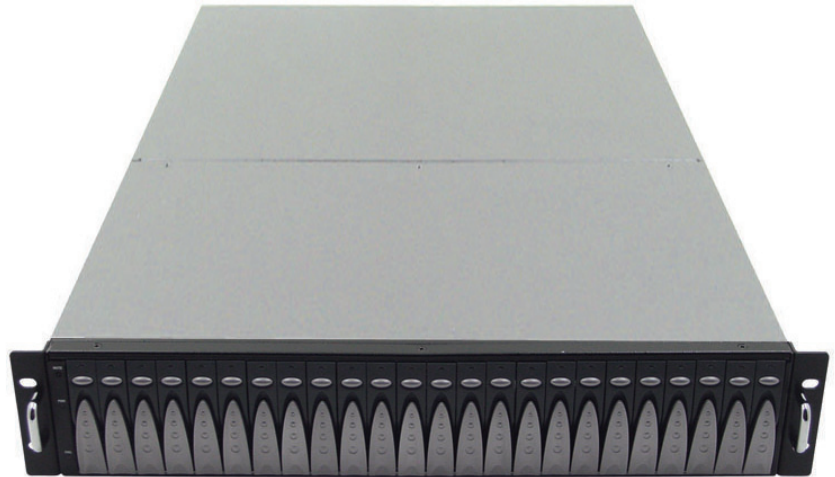

Specifications

Material:	Heavy-duty preplated SPGC cold-rolled steel
Outside:	Texture-coated on front panel
Dimension:	19"(W) x 28"(D) x 3.5"(H)
Cooling:	Middle: 4 x 60x38mm fans
Power Supply:	460W~700W hot-swap redundant power supplies
Expansion:	3-slot PCI via riser card or 7-slot low-profile expansions
Controls:	Power on/off and system reset
Indicators:	Power, LAN, and HDD LED's
System Board:	12" (W) x 13" (D) E-ATX/ SSI EEB 3.5 compliant motherboards
Drive Bay:	External: 24 x SAS SFF 2.5-inch Hot-swap bays Backplane designed with redundant 4x300MB/s bandwidth paths
Temperature:	0°C(32°F) ~ 50°C(122°F)
Humidity:	5%~95% non-condensing

Features

RSA2A2 is an ideal 2U SAS server enclosure for Enterprise level Storage Appliance Server with high density storage and high I/O performance. Twenty-four (24) SAS SFF 2.5-inch disc drives can be populated into this 2U platform supporting up to 1.4TB of storage with 1.2GB/s bandwidth.



Delivering Tomorrow's Solutions

Advanced Industrial Computer, Inc. (AIC)

California Headquarter

17970 E. Ajax Circle
City of Industry, CA 91748
Tel: 626 581 4300
Fax: 626 581 4320
mail: info@aicipc.com
URL: www.aicipc.com

New Jersey Branch

11 Melanie Lane Unit #20
East Hanover, NJ 07936
Tel: 973 884 8886
Fax: 973 884 4794
Email: info@aicipc.com
URL: www.aicipc.com

AIC Europe BV

Peppelkade 58,
3992AK, Houten, the Netherlands
Tel: 31 30 6386789
Fax: 31 30 6360638
mail: hc@aicipc.nl
URL: www.aicipc.com